

STATIC PULVERIZERS

8 models for excavators with operating weight from 3 to 60 ton

Designed for secondary demolition, Hammer static Pulverizers can both break up reinforced concrete structures and separate the steel.

FP SERIES

- REPLACEABLE WEAR PLATES
- CYLINDER FULLY PROTECTED FROM POSSIBLE DEBRIS DURING DEMOLITION
- WEAR PARTS ARE REPLACEABLE ON SITE
- SPEED VALVE *optional
- DESIGNED AND BUILT TO ACHIEVE HIGH CRUSHING FORCE



FIRST QUALITY SECONDARY DEMOLITION

MODELS


		FP03*	FP06*	FP11
t		3-10	6-13	13-18
kg		360	600	1200
l/min		20-70	40-100	140-180
bar		250	250	300
A	mm	1280	1650	2000
B	mm	400	510	660
mm		160	160	200
F1	t	90	115	155
F2	t	40	50	65
F3	t	25	35	50
Ø Max	mm	25	25	30

WWW.HAMMEREUROPE.COM

*All illustrations and numerical data in this catalog are purely indicative and subject to change at our discretion and without notice. We therefore reserve the right to modify them with a view to improving and continuously developing our product.

* The FP03-06 types have replaceable tooth unlike the others FP types that have plates

Technical Drawing

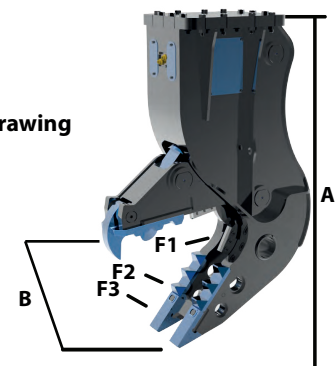



**FIND OUT
MORE**

**ALL THE PARTS THAT MOSTLY UNDERGO
WEARING ARE EASILY REPLACEABLE**



SPEED VALVE (OPTIONAL)

PRESSURE UP TO 300 BAR



MINING & QUARRYING



DEMOLITION & RENOVATION



CONSTRUCTION



METALLURGICAL INDUSTRY

MODELS

		FP15	FP20	FP25	FP30	FP40
	t	13-22	16-25	20-32	24-40	30-60
	kg	1450	2150	2650	2950	3850
	l/min	140-200	200-250	200-300	220-300	350-450
	bar	300	300	300	300	300
A	mm	2100	2500	2700	2800	2810
B	mm	680	850	875	950	1280
	mm	200	200	300	300	300
F1	t	165	180	200	245	290
F2	t	70	85	85	110	140
F3	t	55	60	70	85	110
Ø Max	mm	30	40	40	50	50

*All illustrations and numerical data in this catalog are purely indicative and subject to change at our discretion and without notice. We therefore reserve the right to modify them with a view to improving and continuously developing our product.

