

ROTATING PULVERIZERS

12 models for excavators with operating weight from 1.5 to 90 ton

The rotary pulverizers of the new FR series have been developed for primary and secondary demolition. The jaws are designed for each application area.

FR SERIES

- REPLACEABLE WEAR PLATES
- CYLINDER FULLY PROTECTED FROM POSSIBLE DEBRIS DURING DEMOLITION
- WEAR PARTS REPLACEABLE ON SITE
- SPEED VALVE *optional
- DESIGNED AND BUILT TO ACHIEVE HIGH CRUSHING FORCE




NO LIMITS TO DEMOLITION

MODELS		FR02 ^{NEW}	FR04	FR07	FR09	FR12	FR15
t		1.5-7	5-10	6-13	9-15	12-20	14-23
kg		220	500	750	950	1450	1700
l/min		20-50	50-70	60-100	70-110	110-160	140-200
bar		250	250	260	260	300	300
°		360°	360°	360°	360°	360°	360°
l/min		5-8	5-8	5-8	5-8	20-25	20-30
bar		70	70	70	70	70	70
A	mm	1050	1400	1570	1600	1850	1950
B	mm	355	440	600	650	680	710
mm		160	160	160	160	200	200
F1	t	80	100	115	140	180	195
F2	t	40	50	55	65	110	120
F3	t	25	30	35	40	57	65
Ø Max	mm	20	20	25	25	35	40

*All illustrations and numerical data in this catalog are purely indicative and subject to change at our discretion and without notice. We therefore reserve the right to modify them with a view to improving and continuously developing our product.

Technical Drawing

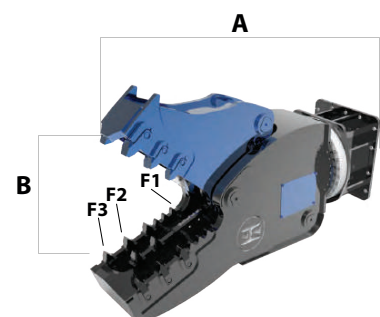

WWW.HAMMEREUROPE.COM




**FIND OUT
MORE**

ALL THE PARTS THAT MOSTLY UNDERGO WEARING ARE EASILY REPLACEABLE



SPEED VALVE (OPTIONAL)

PRESSURE UP TO 300 BAR

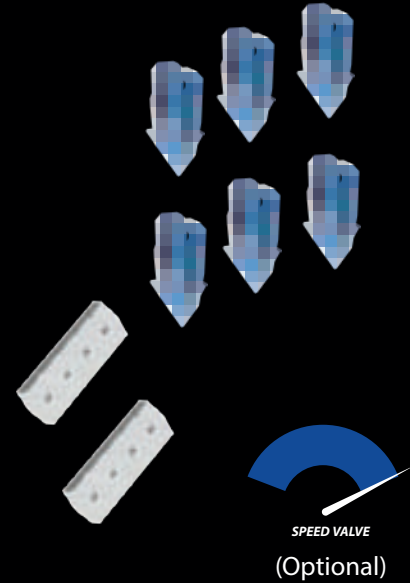

MINING & QUARRYING



DEMOLITION & RENOVATION



CONSTRUCTION



METALLURGICAL INDUSTRY

MODELS

		FR21	FR26	FR32	FR42	FR54	FR80
	t	16-27	20-32	26-40	32-55	40-65	55-90
	kg	2050	2500	3600	4200	5900	7800
	l/min	180-230	200-300	300-350	350-400	400-500	450-550
	bar	300	300	300	300	300	300
	°	360°	360°	360°	360°	360°	360°
	l/min	20-30	20-30	40-50	40-50	40-50	60-80
	bar	70	70	70	70	70	70
A	mm	2200	2300	2510	2700	2900	3950
B	mm	800	920	1000	1150	1280	1400
	mm	200	200	200	200	300	300
F1	t	234	250	370	505	545	620
F2	t	135	140	225	285	330	435
F3	t	80	85	125	146	175	210
Ø Max	mm	45	50	50	60	65	70

*All illustrations and numerical data in this catalog are purely indicative and subject to change at our discretion and without notice. We therefore reserve the right to modify them with a view to improving and continuously developing our product.

